



Fuse Links



Non-Removable Head Expulsion Links-Single Tail


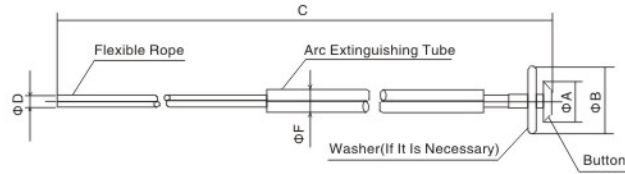


Fig. B. Ta Button Type

Rated Current(A)	Dimension(mm)					Quantity/Carton
	A	B	C	D	F	
1 to 25	12.5 ± 0.2	19.0 ± 0.2	Note 1	2.0	6.5	500
30 to 40	12.5 ± 0.2	19.0 ± 0.2	Note 1	3.0	8.0	500
50 to 100	19.0 ± 0.3	(Not Applicable)	Note 1	5.0	10.0	250
140 to 200	19.0 ± 0.3	(Not Applicable)	Note 1	7.0	12.0	250



Removable Head Expulsion Links-Single Tail

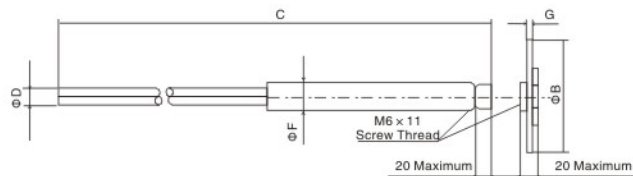

Rated Current(A)	Dimension(mm)					Quantity/Carton
	A	B	C	D	F	
1 to 25	12.5 ± 0.2	19.0 ± 0.2	Note 1	2.0	6.5	500
30 to 40	12.5 ± 0.2	19.0 ± 0.2	Note 1	3.0	8.0	500
50 to 100	19.0 ± 0.3	(Not Applicable)	Note 1	5.0	10.0	250
140 to 200	19.0 ± 0.3	(Not Applicable)	Note 1	7.0	12.0	250



Removable Head Expulsion Links-Double Tail

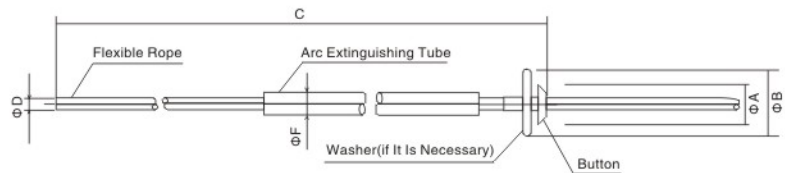


Fig. B. Ta Button Type

Rated Current(A)	Dimension(mm)					Quantity/Carton
	A	B	C	D	F	
1 to 25	12.5 ± 0.2	19.0 ± 0.2	Note 1	2.0	6.5	500
30 to 40	12.5 ± 0.2	19.0 ± 0.2	Note 1	3.0	8.0	500
50 to 100	19.0 ± 0.3	(Not Applicable)	Note 1	5.0	10.0	250
140 to 200	19.0 ± 0.3	(Not Applicable)	Note 1	7.0	12.0	250