



Bolt Type Strain Clamp



NLL- Bolt Type Aluminium Alloy Strain Clamp



Model No.	mm Used Conductor Diameter Range (Binding Band With A1)	Main Dimension(mm)					U Type Bolt(mm ²)		Normal Failure Load (kN)	Reference Weight (kg)
		L1	L2	R	C	M	Pieces	Diameter		
NLL-1	φ 5.6~14.5	140	130	7.5	18	16	2	M12	40	0.9
NLL-2	φ 8.2~17	212	180	8.5	21	16	3	M12	70	1.6
SJCP-3B	5~20	175	128	8.5	28	16	3	M12	70	1.3




NLL-Bolt Type Aluminium Alloy Strain Clamp



Model No.	mm Used Conductor Diameter Range (Binding Band With A1)	Main Dimension(mm)					U Type Bolt(mm ²)		Normal Failure Load (kN)	Reference Weight (kg)
		L1	L2	R	C	M	Pieces	Diameter		
NLL-3	φ 8.2~20	295	250	10.0	24	16	4	M14	70	2.7
NLL-4	φ 13.6~25	324	255	12.5	30	18	4	M16	10	3.9
NLL-5	φ 16.0~32	400	320	16	36	22(24)	5	M16	120	5.6




NLD Malleable Cast Iron Strain Clamp(Galvanized)

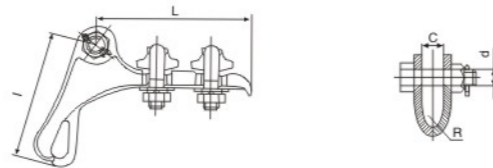

Model No.	Suitable Conductor Diameter Range(mm)	Main Dimension(mm)					Failing Load Not Less Than (kN)	Reference Weight (kg)
		d	C	L	I	R		
NLD-1	5.0~10.0	16	18	150	120	6.5	20	1.3
NLD-2	10.1~14.0	16	18	205	130	8.0	40	2.1




NLD Malleable Cast Iron Strain Clamp(Galvanized)

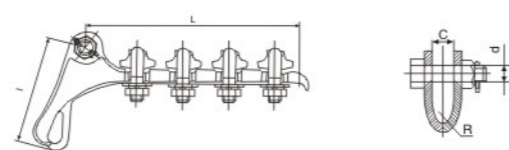


Model No.	Suitable Conductor Diameter Range(mm)	Main Dimension(mm)					Failing Load Not Less Than (kN)	Reference Weight (kg)
		d	C	L	I	R		
NLD-3	14.1~18.0	18	22	310	160	11.0	70	4.6
NLD-4	18.1~23.0	18	25	410	220	12.5	90	7.0




Aluminum Strain Clamp

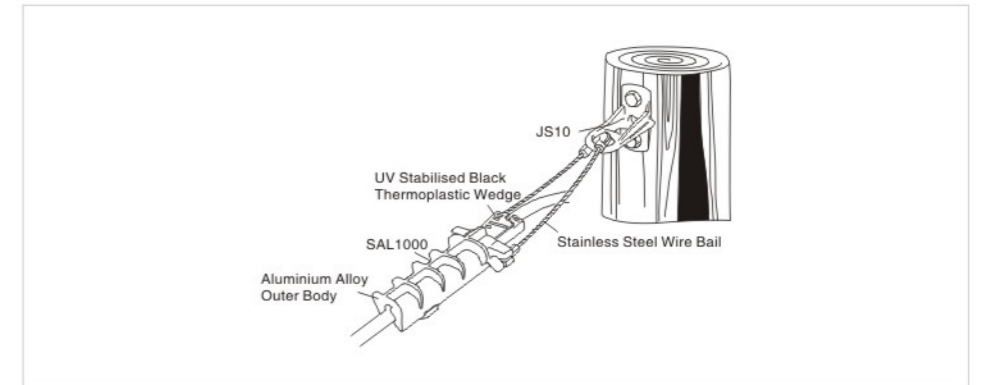

Model No.	Applicable Conductor mm ²	Diameter (mm)	Failing Load kN
SAL 1000	25~35	8~11	10

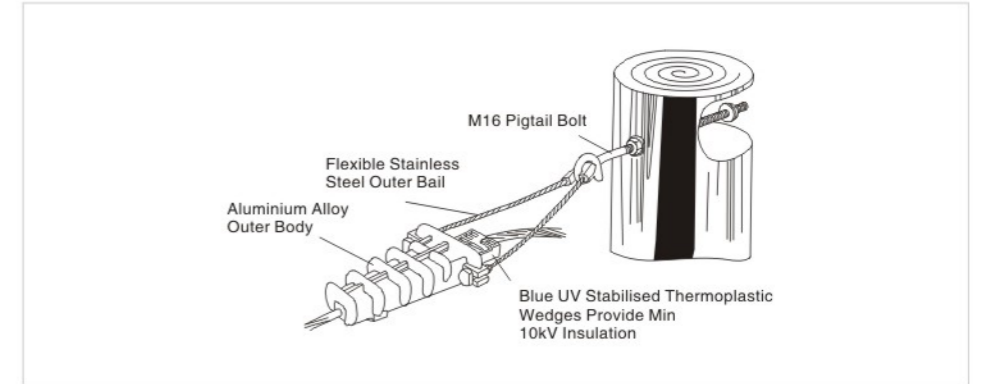

Model No.	Applicable Conductor mm ²	Diameter (mm)	Failing Load kN
SJAL 1500	50~70	11~14	15

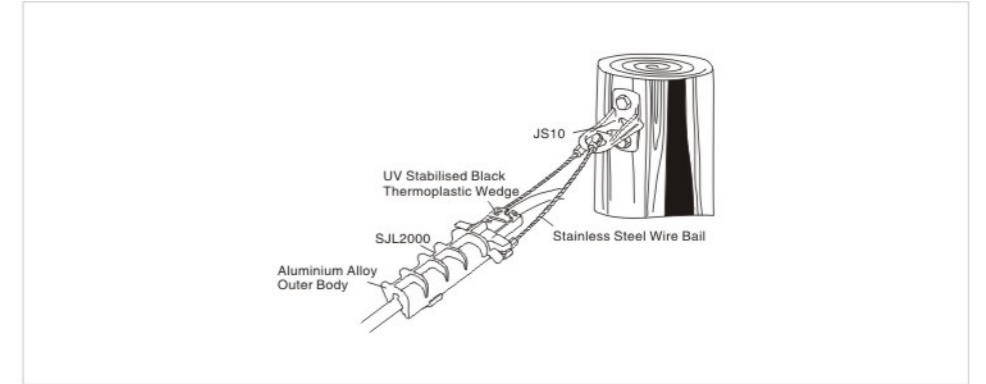

Model No.	Applicable Conductor mm ²	Diameter (mm)	Failing Load kN
SJAL 2000	70~95	14~16	19.5

STRAIN & SUSPENSION CLAMP

Manufactured By Sarah Electric



Model No.	Conductor (mm ²)	Messenger DIA. (mm)	Breaking Load (KN)
SPA 25	2 × 16-4 × 25	4-8	2
SPA 2/25	2 × (16-25)	4-8	2



Model No.	Conductor (mm ²)	Messenger DIA. (mm)	Breaking Load (KN)
SPA 25C	2 × (16-4 × 25)	4-8	2
SPAR 20	2 × (16-35)	10-16	2.5



Model No.	Conductor (mm ²)	Messenger DIA. (mm)	Breaking Load (KN)
SPA 500	16-25	4-8	6
SPA 1500	50-70	11-14	10



Model No.	Conductor (mm ²)	Messenger DIA. (mm)	Breaking Load (KN)
SPA 2000-A	70-95	14-16	15
SPA 2000-B	70-95	14-16	15



Model No.	Conductor (mm ²)	Messenger DIA. (mm)	Breaking Load (KN)
SPAG 25/100	2 × 25-4 × 100	6-16	3
SPAG 16-70	16-70	4-10	3



Model No.	Conductor (mm ²)	Messenger DIA. (mm)	Breaking Load (KN)
SPAG 216/425	2 × 16-4 × 25	4-8	4
SPAG 216/435	2 × 16-4 × 35	4-11	4

STRAIN & SUSPENSION CLAMP

Manufactured By Sarah Electric



Model No.	Conductor (mm ²)	Wire DIA. (mm)	Breaking Load (KN)
SPA 2/35	2 × (16-35)	3-6	6.5
SPA 4/35	2 × 16-4 × 35	3-6	8



Model No.	Conductor (mm ²)	Wire DIA. (mm)	Breaking Load (KN)
AC-O-06	16-25	2-6	5
AC-O-07	16-35	3-7	6



Model No.	Conductor (mm ²)	Wire DIA. (mm)	Breaking Load (KN)
AC-O-07-500	16-25	3-7	10
AC-O-08	16-25	3-7	4



Model No.	Conductor (mm ²)	Wire DIA. (mm)	Breaking Load (KN)
AC-O-05	16-25	3-6	3
PAT 450/120	4 × (50-120)	11-17	20



Model No.	Conductor (mm ²)	Wire DIA. (mm)	Breaking Load (KN)
PAT 435/50	4 × (35-50)	11-14	15
PAT 470/95	4 × (70-95)	14-16	20



Model No.	Conductor (mm ²)	Wire DIA. (mm)	Breaking Load (KN)
RPA 425/50	4 × (25-50)	10-12	15
RPA 450/120	4 × (50-120)	11-17	20

STRAIN & SUSPENSION CLAMP

Manufactured By Sarah Electric



Model No.	Conductor (mm)	Width (mm)	Height (mm)
SSC	8-15mm	38	102



Model No.	Conductor (mm ²)	Wire DIA. (mm)	Breaking Load (KN)
SPS 1500	25-95	7.5-16.5	12
SPS 54	25-95	7.5-15.5	10



Model No.	Conductor (mm ²)	Wire DIA. (mm)	Breaking Load (KN)
SSP 25/120	2 x (25-35)-4 x (16-120)	12-42	10
SLM 1500	25-95	7.5-15.5	8



Model No.	Conductor (mm ²)	Wire DIA. (mm)	Breaking Load (KN)
SHW 95A	25-95	7.5-16.5	10
SHW 95B	25-95	7.5-16.5	15



Model No.	Conductor (mm ²)	Wire DIA. (mm)	Breaking Load (KN)
CS 14	25-95	5-13	10
ES 14	25-95	5-14	10



Model No.	Breaking Load (KN)
CS1500	15
ES1500	15

STRAIN & SUSPENSION CLAMP

Manufactured By Sarah Electric



Model No.	Breaking Load (KN)
SCS1500	10
SCS1200	10



Model No.	Breaking Load (KN)
HWPT25	2 x 16/4 x 25
HWPT50	4 x 25/4 x 50
HWPT95	4 x 70/4 x 95



Model No.	Breaking Load (KN)
JS10	15
JS20	20



Model No.	Conductor (mm ²)
CT-150	50-15/4-50
CT-295	35-95/2 x 2.5-35



Model No.	Conductor (mm ²)
CT-70	16-70/1.5-35



Model No.	Conductor (mm ²)	Diameter (mm)	Breaking Load (KN)
JBG-1	25-70	8-14	10